

DRAFT DAMPER ASSEMBLY


Model E-Link

- Complete Draft Damper Assembly saves installation time and cost by factory mounting actuator, draft transmitter and low draft switch
- The Model E-Link Draft Damper Assembly and JC-22D Draft Controller form a complete draft control package

The Model E-Link Draft Damper Assembly pre-mounts a DM-1E-P1-S2 actuator and JC-22XMTR Draft Range Transmitter Assembly. Only a single boiler outlet draft connection is required. The Model E-Link Draft Damper Assembly is part of a full scope control package that assures safe and efficient control with undivided system responsibility.

Suggested Specifications

Provide a factory assembled boiler outlet draft damper assembly for each boiler. Factory mount the draft damper actuator, draft transmitter and time delayed high pressure cut out. The draft damper shall be a dual opposed blade design, have 24" inside diameter [select from 12", 16", 20" or 24" diameter to match boiler outlet, consult factory for larger sizes], constructed of 10 gauge rolled steel. Non-opposed blade damper designs are not acceptable. The draft range transmitter and time delayed, high pressure (low draft) cut-out assembly shall be totally enclosed in a single dust-tight, splash-proof enclosure. A single draft connection shall be internally piped to a -1"wc to +1"wc 4-20 mAdc transmitter and an independent low draft switch. The low draft switch setpoint shall be field adjustable from +0.15"wc to +4.0"wc. The low draft switch shall be mounted and wired to a pilot light so as to illuminate when the low draft switch activates and to a 5 second time delay relay so as to provide an isolated "Low Draft Cut-Out," 10 ampere contact for use in the Flame Safeguard Limit Circuit. The time delay feature helps avoid nuisance burner shutdowns due to momentary draft fluctuations. The actuator shall have adequate power to automatically position the damper and shall be suitable for control by the Draft Controller. The actuator shall be totally enclosed in a dust-tight housing; have integral, snap-action, travel limit and open proving switches, electrically isolated feedback potentiometer. A double ended output shaft shall have an integral brake for precise positioning without backlash, rotate 90° in 30 seconds and be capable of being stopped, started, or instantly reversed without loss of power or overloading. The damper actuator and damper assembly shall be stroked at the factory to ensure proper alignment. "Shipped Loose" components will not be accepted. The draft damper assembly shall be a Preferred Instruments, Danbury CT, Model E-link Draft Damper Assembly.

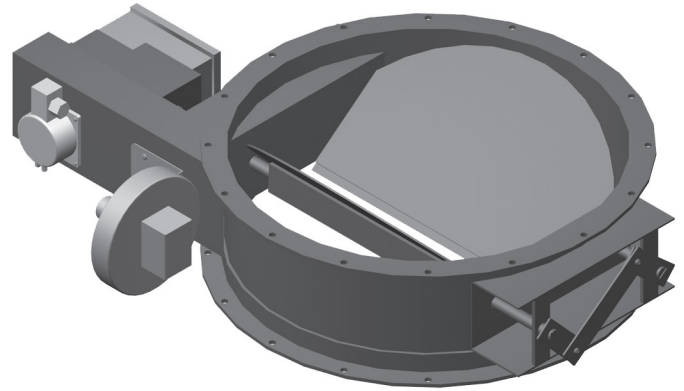

Draft Damper Assembly
Model E-Link

Standard Equipment

Draft Damper Assembly preassembled with Model DM-1E-P1-S2 Electric Actuator and Model JC-22XMTR Draft Transmitter with delayed high pressure switch.

Specifications

Damper Frame:	10 gauge Carbon Steel Rolled Channel with mounting holes
Damper Blades:	(2) Opposed Blades, 10 gauge Carbon Steel
Inside Diameters:	12", 16", 20", and 24" consult Factory for nonstandard sizes
Height:	8"
Bolt Holes:	16 for 24", 12 for 12", 16" and 20"
Finish:	High temperature primer
Actuator:	DM-1E-P1-S2 Rotary Actuator, close coupled to Damper Shaft

Ordering Information

1. Specify E-Link Draft Damper Assembly
2. Specify Damper Size [12", 16", 20" or 24"], consult factory for larger or none listed sizes
3. Specify Model JC-22D Draft Controller (see page 118)
4. Specify Model SPS Shaft Position Sensor (not required for "Floating" Draft Control System) (see page 200)

Instrument & Control
boilers larger than 50 bhp